

Поръчки по дължина La.


дължина Lw	Сечение	Диапазон
2-15J		1400-9300
3-15J		1400-9300
4-15J		1400-9300
5-15J		1400-9300
6-15J		1400-9300

Изброените дължини са само препоръчителни. В указания диапазон може да бъде поръчана в

5V/15J		La	
mm			
			5V 550
			5V 560
			5V 570
			5V 590
			5V 600
			5V 610
			5V 630
			5V 650
			5V 670
			1400
			1422
			1450
			1500
			1524
			1550
			1600
			1650
			1702

	5V 690	1750
	5V 710	1803
	5V 730	1850
	5V 750	1905
	5V 770	1950
	5V 790	2000
	5V 800	2032
	5V 810	2060
	5V 835	2120
	5V 850	2159
	5V 860	2180
	5V 880	2240
	5V 900	2286
<b>5V/15J</b>		
		<b>La</b>
<b>mm</b>		
	5V 905	2300
	5V 930	2360
	5V 950	2413
	5V 995	2430
	5V 895	2500
	5V 1000	2540
	5V 1015	2580
	5V 1045	2650
	5V 1060	2692

5V 1070	2720
5V 1100	2800
5V 1120	2845
5V 1140	2900
5V 1180	2997
5V 1210	3070
5V 1240	3150
5V 1250	3175
5V 1280	3250
5V 1320	3353
5V 1360	3450
5V 1400	3556
5V 1435	3650
5V 1475	3750
5V 1500	3810
5V 1525	3870
5V 1575	4000
5V 1600	4064
5V 1620	4120
5V 1675	4250
5V 1700	4318
5V 1720	4370

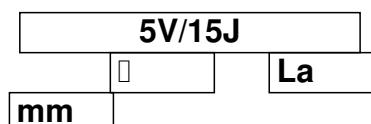

	5V 1770	4500
	5V 1800	4572
	5V 1820	4620
	5V 1870	4750
	5V 1900	4826
	5V 1915	4870
	5V 1970	5000
	5V 2000	5080
	5V 2030	5150
	5V 2085	5300
	5V 2120	5385
	5V 2145	5450
	5V 2205	5600
5V/15J		
mm		
	5V 2285	5800
	5V 2240	5690
	5V 2360	5994
	5V 2420	6150
	5V 2480	6300
	5V 2500	6350
	5V 2560	6500
	5V 2640	6700
	5V 2650	6731

5V 2715	6900
5V 2795	7100
5V 2875	7300
5V 2900	7366
5V 2955	7500
5V 3000	7620
5V 3050	7750
5V 3150	8001
5V 3350	8509
5V 3550	9017
5V 3660	9300

$L_w = L_a$

$L_i = L_a - 71$

Клиновидните ремъци се явяват токопроводящи и издръжливи на температури от -30 °C до +60 °C

---

Пример за обозначаване: **3-15J 2800 La**

3-15J - количество на ребрата и обозначение на сечението

La - външна дължина